

Turbo FloodJet® Wide Angle Flat Spray Tips

Features:

- Excellent spray distribution for uniform coverage along the boom.
- Nozzle design incorporates a pre-orifice to produce larger droplets for less drift.
- Large, round orifice reduces clogging.
- Stainless steel or polymer with VisiFlo color-coding band for easy size identification.
- Can be used with CP25600*-NYR Quick cap and gasket for automatic alignment.

QCT Cam-Loc Adapter:

- Provides easy changeover from high capacity to lower capacity nozzles.
- Adapter fits standard 3/4" quick connect Cam-Loc holders.
- Corrosion-resistant stainless steel and polypropylene construction.
- Rated up to 100 PSI
- Use QJT-NYB to retrofit to Quick TeeJet.



Part#	Description	Price
QCT	Cam Lock Adapter	\$21.09

QJ90-1-NYR:

One piece 90° elbow is ideal for installation of TK-VS FloodJet and TF-VS or TF-VP Turbo FloodJet nozzles on single or multiple outlet nozzle bodies. Proper orientation of spray tip enhances spray distribution quality.



Part#	Description	Price
QJ90-1-NYR	90° Adapter	\$4.47



List Price

Nozzle Part#	Price
TF-VS*	\$13.29
TF-VP*	\$3.00

Required Cap


25600*-NYR	\$1.18
------------	--------

Quick TeeJet Cap & Seat Gasket Set
*Specify Cap Color



CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
—	VERY GOOD	EXCELLENT

Nozzle	PSI	DROP SIZE	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ./MIN.	40°								20°								
					GPA												GALLONS PER 1000 SQ. FT.				
					4 MPH	5 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	20 MPH	2 MPH	3 MPH	4 MPH	5 MPH					
TF-2 (50)	10	XC	0.20	26	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5	0.68	0.45	0.34	0.27					
	20	XC	0.28	36	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1	0.95	0.63	0.48	0.38					
	30	XC	0.35	45	13.0	10.4	8.7	6.5	5.2	4.3	3.5	2.6	1.2	0.79	0.60	0.48					
	40	XC	0.40	51	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	1.4	0.91	0.68	0.54					
TF-2.5 (50)	10	XC	0.25	32	9.3	7.4	6.2	4.6	3.7	3.1	2.5	1.9	0.85	0.57	0.43	0.34					
	20	XC	0.35	45	13.0	10.4	8.7	6.5	5.2	4.3	3.5	2.6	1.2	0.79	0.60	0.48					
	40	XC	0.50	64	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	1.7	1.1	0.85	0.68					
TF-3 (50)	10	XC	0.30	38	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	1.0	0.68	0.51	0.41					
	20	XC	0.42	54	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1	1.4	0.95	0.71	0.57					
	30	XC	0.52	67	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	1.8	1.2	0.88	0.71					
TF-4 (50)	10	XC	0.40	51	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	1.4	0.91	0.68	0.54					
	20	XC	0.57	73	21	16.9	14.1	10.6	8.5	7.1	5.6	4.2	1.9	1.3	0.97	0.78					
	30	XC	0.69	88	26	20	17.1	12.8	10.2	8.5	6.8	5.1	2.3	1.6	1.2	0.94					
TF-5	10	XC	0.50	64	18.6	14.9	12.4	9.3	7.4	6.2	5.0	3.7	1.7	1.1	0.85	0.68					
	20	XC	0.71	91	26	21	17.6	13.2	10.5	8.8	7.0	5.3	2.4	1.6	1.2	0.97					
	30	XC	0.87	111	32	26	22	16.1	12.9	10.8	8.6	6.5	3.0	2.0	1.5	1.2					
TF-7.5	10	XC	0.75	96	28	22	18.6	13.9	11.1	9.3	7.4	5.6	2.6	1.7	1.3	1.0					
	20	XC	1.06	136	39	31	26	19.7	15.7	13.1	10.5	7.9	3.6	2.4	1.8	1.4					
	30	XC	1.30	166	48	39	32	24	19.3	16.1	12.9	9.7	4.4	2.9	2.2	1.8					
TF-10	10	XC	1.50	192	56	45	37	28	22	18.6	14.9	11.1	5.1	3.4	2.6	2.0					
	20	XC	2.00	256	74	59	50	37	30	25	18.6	14.9	9.9	7.4	5.6	4.3	3.4				
	30	XC	2.00	256	74	59	50	37	30	25	18.6	14.9	9.9	7.4	5.6	4.3	3.4				

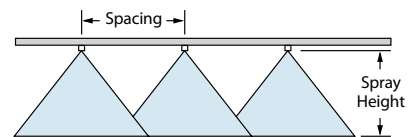

Optimum Spray Height

Spacing	Optimum Spray Height
20"	24"
30"	30"
40"	39"

How to order:

Specify tip number.

Example:

TF-VS4

Stainless Steel with VisiFlo color-coding
Polymer with VisiFlo color-coding

TF-VP4

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C). †Specify material.

