

ConeJet® VisiFlo® Hollow Cone Spray Tips

Excellent: Post-Emerge Contact Herbicides, Fungicides and Insecticides - To assure finely atomized spray droplets reach target areas.
 Good: For use with defoliant and foliar fertilizers at pressures 40 PSI and above.


Features:

- VisiFlo color-coded version consists of stainless steel or ceramic orifice in polypropylene body.
- Maximum operating pressure 300 PSI.
- Spray angle is 80° at 100 PSI.
- TX-VS1 and TX-VS2 available in VisiFlo color-coded stainless steel only.


List Price	
Nozzle Part#	Price
TX-* (Brass)	\$5.91
TX-SS* (Stainless Steel)	\$37.21
TX-VS* (Color-coded)	\$6.62
Required Cap	
25608*-NYR	\$1.18
Quick TeeJet Cap & Seat Gasket Set	
*Specify Cap Color	



PSI	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ./MIN.	GPA 20°								
			4 MPH	5 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	20 MPH	
TX-1	40	0.017	2.2	1.3	1.0	0.84	0.63	0.50	0.42	0.34	0.25
TX-†1 (100)	60	0.020	2.6	1.5	1.2	0.99	0.74	0.59	0.50	0.40	0.30
	80	0.022	2.8	1.6	1.3	1.1	0.82	0.65	0.54	0.44	0.33
	100	0.024	3.1	1.8	1.4	1.2	0.89	0.71	0.59	0.48	0.36
	125	0.027	3.5	2.0	1.6	1.3	1.0	0.80	0.67	0.53	0.40
TX-2	40	0.033	4.2	2.5	2.0	1.6	1.2	0.98	0.82	0.65	0.49
	60	0.040	5.1	3.0	2.4	2.0	1.5	1.2	0.99	0.79	0.59
TX-†2 (100)	80	0.045	5.8	3.3	2.7	2.2	1.7	1.3	1.1	0.89	0.67
	100	0.050	6.4	3.7	3.0	2.5	1.9	1.5	1.2	0.99	0.74
	125	0.055	7.0	4.1	3.3	2.7	2.0	1.6	1.4	1.1	0.82
TX-3	40	0.050	6.4	3.7	3.0	2.5	1.9	1.5	1.2	0.99	0.74
	60	0.060	7.7	4.5	3.6	3.0	2.2	1.8	1.5	1.2	0.89
TX-†3 (100)	80	0.068	8.7	5.0	4.0	3.4	2.5	2.0	1.7	1.3	1.0
	100	0.075	9.6	5.6	4.5	3.7	2.8	2.2	1.9	1.5	1.1
	125	0.082	10	6.1	4.9	4.1	3.0	2.4	2.0	1.6	1.2
TX-4	40	0.067	8.6	5.0	4.0	3.3	2.5	2.0	1.7	1.3	1.0
	60	0.080	10	5.9	4.8	4.0	3.0	2.4	2.0	1.6	1.2
TX-†4 (50)	80	0.091	12	6.8	5.4	4.5	3.4	2.7	2.3	1.8	1.4
	100	0.10	13	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5
	125	0.11	14	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6
TX-6	40	0.10	13	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5
	60	0.12	15	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8
TX-†6 (50)	80	0.14	18	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1
	100	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2
	125	0.17	22	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5
TX-8	40	0.13	17	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9
	60	0.16	20	11.9	9.5	7.9	5.9	4.8	4.0	3.2	2.4
TX-†8 (50)	80	0.19	24	14.1	11.3	9.4	7.1	5.6	4.7	3.8	2.8
	100	0.21	27	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1
	125	0.23	29	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4
TX-10	40	0.17	22	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5
	60	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0
TX-†10 (50)	80	0.23	29	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4
	100	0.26	33	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9
	125	0.29	37	22	17.2	14.4	10.8	8.6	7.2	5.7	4.3
TX-12	40	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0
	60	0.24	31	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6
TX-†12 (50)	80	0.28	36	21	16.6	13.9	10.4	8.3	6.9	5.5	4.2
	100	0.31	40	23	18.4	15.3	11.5	9.2	7.7	6.1	4.6
	125	0.34	44	25	20	16.8	12.6	10.1	8.4	6.7	5.0
TX-18	40	0.30	38	22	17.8	14.9	11.1	8.9	7.4	5.9	4.5
	60	0.37	47	27	22	18.3	13.7	11.0	9.2	7.3	5.5
TX-†18 (50)	80	0.42	54	31	25	21	15.6	12.5	10.4	8.3	6.2
	100	0.47	60	35	28	23	17.4	14.0	11.6	9.3	7.0
	125	0.53	68	39	31	26	19.7	15.7	13.1	10.5	7.9
TX-26	40	0.43	55	32	26	21	16.0	12.8	10.6	8.5	6.4
	60	0.53	68	39	31	26	19.7	15.7	13.1	10.5	7.9
TX-†26 (50)	80	0.61	78	45	36	30	23	18.1	15.1	12.1	9.1
	100	0.68	87	50	40	34	25	20	16.8	13.5	10.1
	125	0.76	97	56	45	38	28	23	18.8	15.0	11.3

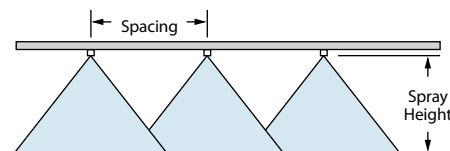

Optimum Spray Height



How to order:

Specify tip number.

Example:

- TX-VS4 Stainless Steel with VisiFlo color-coding
- TX-4 Brass
- TX-SS4 Stainless Steel
- TX-VK4 Ceramic with VisiFlo color-coding

List Price
Please Apply Discount

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).

†Specify material.