

TeeJet® Even Flat Spray Tips

Features:


- Ideal for banding over the row or in row middles.
- Provides uniform distribution throughout the flat spray pattern.
- Easily mounted on spray boom or planter.
- Available with VisiFlo color-coding in stainless steel or all stainless steel, hardened stainless steel and brass.



List Price
Please Apply Discount

List Price	
Nozzle Part#	Price
TP80**EVS S.S. Color-coded	\$6.25
TP80**E-SS Stainless Steel	\$11.00
TP80**E Brass	\$4.26
TP80**E-HSS Hardened S.S.	\$14.88
Required Cap	
25612-* -NYR	\$1.04
Quick TeeJet Cap & Seat Gasket Set	
*Specify Cap Color	

PSI	CAPACITY ONE NOZZLE IN GPM	GPA \triangle 30" \triangle Field Acres													
		3 MPH	3.5 MPH	4 MPH	4.5 MPH	5 MPH	5.5 MPH	6 MPH	6.5 MPH	7 MPH	7.5 MPH	8 MPH	8.5 MPH		
20	0.071	4.7	4.0	3.5	3.1	2.8	2.6	2.3	2.2	2.0	1.9	1.8	1.7		
30	0.087	5.7	4.9	4.3	3.8	3.4	3.1	2.9	2.7	2.5	2.3	2.2	2.0		
40	0.10	6.6	5.7	5.0	4.4	4.0	3.6	3.3	3.0	2.8	2.6	2.5	2.3		
50	0.11	7.3	6.2	5.4	4.8	4.4	4.0	3.6	3.4	3.1	2.9	2.7	2.6		
60	0.12	7.9	6.8	5.9	5.3	4.8	4.3	4.0	3.7	3.4	3.2	3.0	2.8		
20	0.11	7.3	6.2	5.4	4.8	4.4	4.0	3.6	3.4	3.1	2.9	2.7	2.6		
30	0.13	8.6	7.4	6.4	5.7	5.1	4.7	4.3	4.0	3.7	3.4	3.2	3.0		
40	0.15	9.9	8.5	7.4	6.6	5.9	5.4	5.0	4.6	4.2	4.0	3.7	3.5		
50	0.17	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0		
60	0.18	11.9	10.2	8.9	7.9	7.1	6.5	5.9	5.5	5.1	4.8	4.5	4.2		
20	0.14	9.2	7.9	6.9	6.2	5.5	5.0	4.6	4.3	4.0	3.7	3.5	3.3		
30	0.17	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0		
40	0.20	13.2	11.3	9.9	8.8	7.9	7.2	6.6	6.1	5.7	5.3	5.0	4.7		
50	0.22	14.5	12.4	10.9	9.7	8.7	7.9	7.3	6.7	6.2	5.8	5.4	5.1		
60	0.24	15.8	13.6	11.9	10.6	9.5	8.6	7.9	7.3	6.8	6.3	5.9	5.6		
20	0.21	13.9	11.9	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	5.2	4.9		
30	0.26	17.2	14.7	12.9	11.4	10.3	9.4	8.6	7.9	7.4	6.9	6.4	6.1		
40	0.30	19.8	17.0	14.9	13.2	11.9	10.8	9.9	9.1	8.5	7.9	7.4	7.0		
50	0.34	22	19.2	16.8	15.0	13.5	12.2	11.2	10.4	9.6	9.0	8.4	7.9		
60	0.37	24	21	18.3	16.3	14.7	13.3	12.2	11.3	10.5	9.8	9.2	8.6		
20	0.28	18.5	15.8	13.9	12.3	11.1	10.1	9.2	8.5	7.9	7.4	6.9	6.5		
30	0.35	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2		
40	0.40	26	23	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3		
50	0.45	30	25	22	19.8	17.8	16.2	14.9	13.7	12.7	11.9	11.1	10.5		
60	0.49	32	28	24	22	19.4	17.6	16.2	14.9	13.9	12.9	12.1	11.4		
20	0.35	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2		
30	0.43	28	24	21	18.9	17.0	15.5	14.2	13.1	12.2	11.4	10.6	10.0		
40	0.50	33	28	25	22	19.8	18.0	16.5	15.2	14.1	13.2	12.4	11.6		
50	0.56	37	32	28	25	22	20	18.5	17.1	15.8	14.8	13.9	13.0		
60	0.61	40	35	30	27	24	22	20	18.6	17.3	16.1	15.1	14.2		
20	0.42	28	24	21	18.5	16.6	15.1	13.9	12.8	11.9	11.1	10.4	9.8		
30	0.52	34	29	26	23	21	18.7	17.2	15.8	14.7	13.7	12.9	12.1		
40	0.60	40	34	30	26	24	22	19.8	18.3	17.0	15.8	14.9	14.0		
50	0.67	44	38	33	29	27	24	22	20	19.0	17.7	16.6	15.6		
60	0.73	48	41	36	32	29	26	24	22	21	19.3	18.1	17.0		
20	0.57	38	32	28	25	23	21	18.8	17.4	16.1	15.0	14.1	13.3		
30	0.69	46	39	34	30	27	25	23	21	19.5	18.2	17.1	16.1		
40	0.80	53	45	40	35	32	29	26	24	23	21	19.8	18.6		
50	0.89	59	50	44	39	35	32	29	27	25	23	22	21		
60	0.98	65	55	49	43	39	35	32	30	28	26	24	23		
20	0.71	47	40	35	31	28	26	23	22	20	18.7	17.6	16.5		
30	0.87	57	49	43	38	34	31	29	27	25	23	22	20		
40	1.00	66	57	50	44	40	36	33	30	28	26	25	23		
50	1.12	74	63	55	49	44	40	37	34	32	30	28	26		
60	1.22	81	69	60	54	48	44	40	37	35	32	30	28		
20	1.06	70	60	52	47	42	38	35	32	30	28	26	25		
30	1.30	86	74	64	57	51	47	43	40	37	34	32	30		
40	1.50	99	85	74	66	59	54	50	46	42	40	37	35		
50	1.68	111	95	83	74	67	60	55	51	48	44	42	39		
60	1.84	121	104	91	81	73	66	61	56	52	49	46	43		

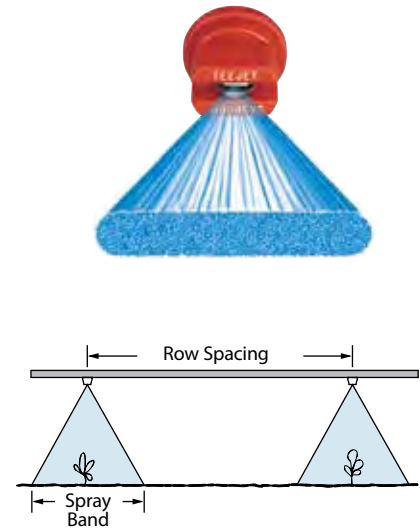

Nozzle	GPA Conversion Factors*					GPA Conversion Factors*	
	40°	65°	80°	95°	110°	20'	30'
8"	11"	6"	5"	4"	3"	2.50	3.75
10"	14"	8"	6"	5"	4"	2.00	3.00
12"	16"	9"	7"	5"	4"	1.67	2.50
15"	21"	12"	9"	7"	5"	1.33	2.00

How to order:

Specify tip number.

Example:

TP8002EVS Stainless Steel with VisiFlo color-coding

TP8002E-HSS Hardened Stainless Steel

TP8002E-SS Stainless Steel

TP8002E Brass

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).

† Available in brass and/or stainless steel and/or hardened stainless steel.